


4. Remove the screws D (6) and collars (7).
5. Remove the screw E (8) and screws F (9).
6. Disconnect the connector (10).
7. Remove the right leg shield (11) with carefully release tabs.

Installation:

- Installation can be done in the reverse order of removal.

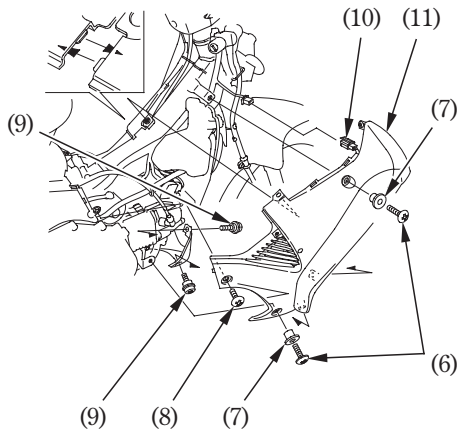

- (6) Screws D
(7) Collars
(8) Screw E

- (9) Screws F
(10) Connector
(11) Right leg shield