



4. Remove the left caliper assembly (4).  
Remove the right caliper assembly (5)  
from the fork leg by removing the fixing  
bolts (6).

**CAUTION:**

- \* To avoid damage to the brake hose,  
support the caliper assembly so that  
it doesn't hang from the hose. Do not  
twist the brake hose.

**NOTE:**

- \* Do not depress the brake lever and brake  
pedal when the wheel is off the  
motorcycle. The caliper piston will be  
forced out of the cylinder with  
subsequent loss of brake fluid. If this  
occurs, servicing of the brake system will  
be necessary. See your authorized Honda  
dealer for this service.

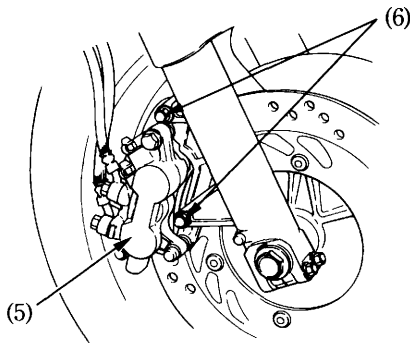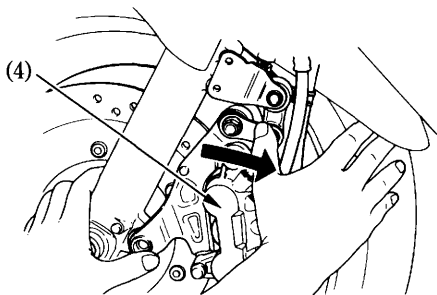

(4) Left caliper assembly

(5) Right caliper assembly

(6) Fixing bolts