


# Front Suspension Adjustments


## Fork Oil Capacity (DE type):

Standard 0.47 kgf/mm (26.32 lbf/in) Fork Spring

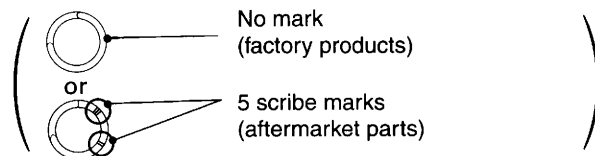


Standard oil capacity	404 cm <sup>3</sup> (13.7 US oz) (14.2 Imp oz)	
Maximum oil capacity	432 cm <sup>3</sup> (14.6 US oz) (15.2 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	336 cm <sup>3</sup> (11.4 US oz) (11.8 Imp oz)	Slightly softer as it nears full compression.

Optional Softer 0.45 kgf/mm (25.20 lbf/in) Fork Spring

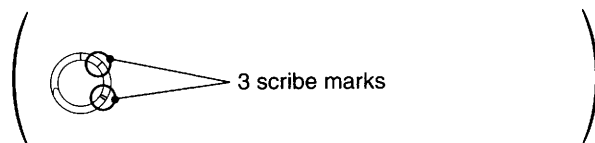

Standard oil capacity	401 cm <sup>3</sup> (13.6 US oz) (14.1 Imp oz)	
Maximum oil capacity	429 cm <sup>3</sup> (14.5 US oz) (15.1 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	334 cm <sup>3</sup> (11.3 US oz) (11.8 Imp oz)	Slightly softer as it nears full compression.

Optional Stiffer 0.49 kgf/mm (27.44 lbf/in) Fork Spring

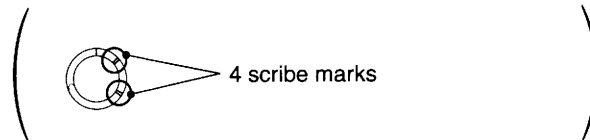

Standard oil capacity	398 cm <sup>3</sup> (13.5 US oz) (14.0 Imp oz)	
Maximum oil capacity	427 cm <sup>3</sup> (14.4 US oz) (15.0 Imp oz)	Slightly stiffer as it nears full compression.
Minimum oil capacity	331 cm <sup>3</sup> (11.2 US oz) (11.7 Imp oz)	Slightly softer as it nears full compression.

Be sure the oil capacity is the same in both fork legs.