


# Drive Chain

6. Inspect the front and rear sprocket teeth for excessive wear or damage. If necessary, have your Honda dealer replace a worn sprocket.

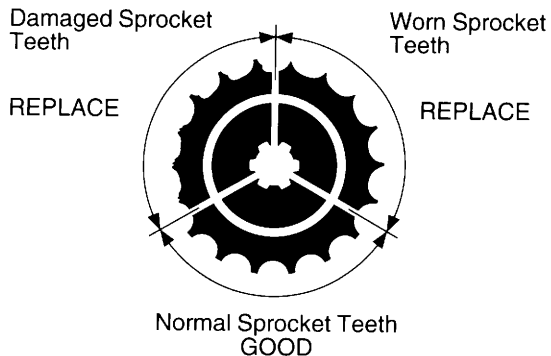


## NOTICE

*Use of a new chain with worn sprockets will cause rapid chain wear.*

## Adjustment

### LEFT SIDE

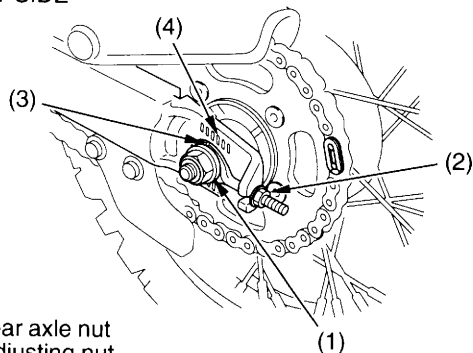

- (1) rear axle nut
- (2) adjusting nut
- (3) adjuster index mark
- (4) graduated scale

1. Loosen the rear axle nut ( 1 ).
2. Turn the adjusting nuts ( 2 ) on the right and left chain adjusters an equal number of turns to increase or decrease chain slack.