


REAR SEAT COVER

See your Honda dealer for installation/removal of the rear seat cover.

Installation:

1. Remove the seat (page 44).
2. Remove the grab rail mounting bolts (1) and grab rails (2).

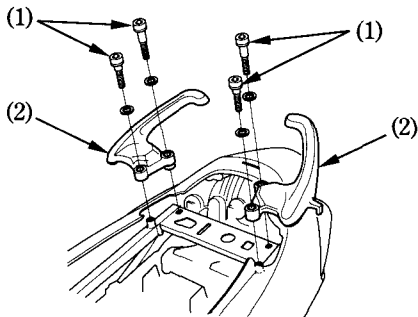


- (1) Grab rail mounting bolts
(2) Grab rails

3. Remove the bolts (3) and cowl plugs (4).
4. Install the seat securely, then install the rear seat cover (5). Set the bolts (3) and tighten them securely.

▲WARNING

***The grab rails must be returned to position when riding in tandem.**

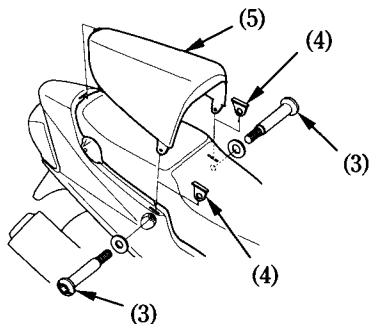

- (3) Bolts
(4) Cowl plugs
(5) Rear seat cover