


7. Check the clearances between each surface of the brake disc and the brake bracket (not the brake pads) are symmetrical.

► If the clearances are symmetrical, loosen the left axle pinch bolts and pull the left fork outward or push inward to adjust the clearance.

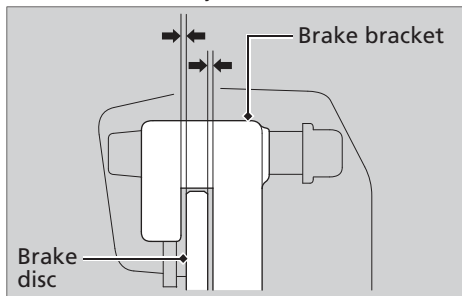

8. Tighten the right axle pinch bolts.

**Torque:** 16 lbf·ft (22 N·m, 2.2 kgf·m).

If a torque wrench was not used for installation, see your dealer as soon as possible to verify proper assembly.

## ► Rear Wheel

### Muffler Removal

1. Park on a firm, level surface.
2. Remove the right footpeg by removing footpeg bolt A, B and footpeg nut.

