


# FRAME/BODY PANELS/EXHAUST SYSTEM

## INSTALLATION

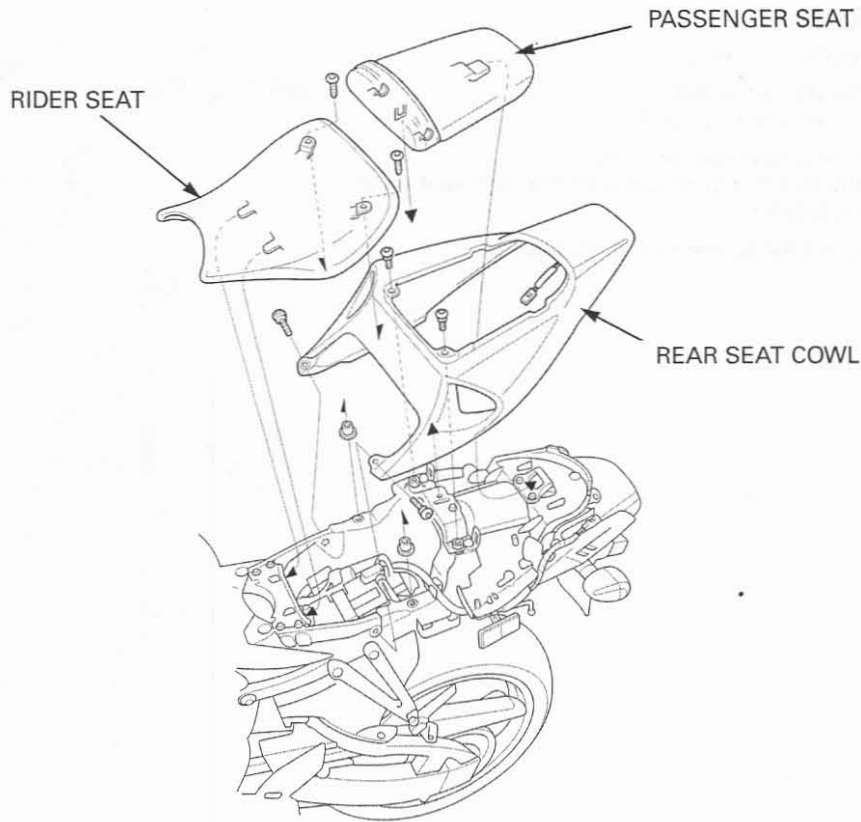

*Make sure that the mating surfaces of the cowl bottom are seated onto the rear fender properly before tightening the bolts.*

- Connect the tail/brake light connector.
- Install the rear seat cowl over the seat rail and rear fender being careful not to damage the wire harness.
- Align the tail/brake light bolt studs with the grommets on the rear fender as shown.
- Install and tighten the rear seat cowl mounting screws.
- Install the removed parts in the reverse order of removal.

