


Handle Rear Cover

Remove the rearview mirrors.
Remove the two tapping screws and the screw.
Release the three hooks by pushing down the cover and sliding it rearward.
Remove the cover from the handlebar.

NOTE


- When installing, be careful not to pinch the wires.

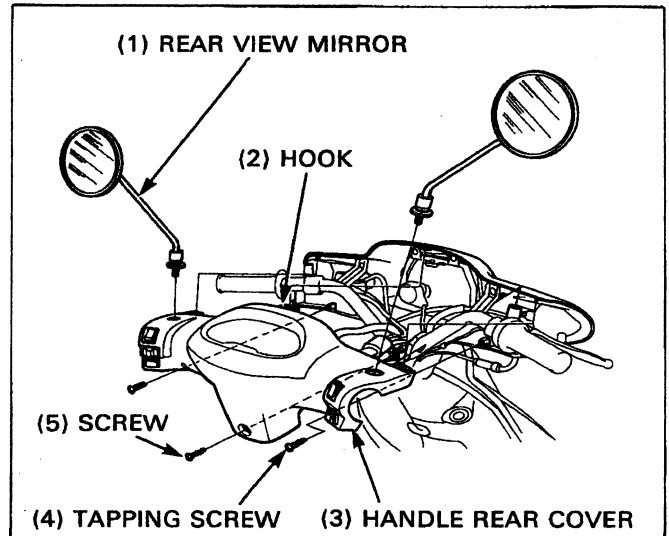

Disconnect the speedometer cable from the speedometer.
Disconnect the five connectors from the handlebar switches.
Remove the three screws and the cover from the instrument case.

NOTE

- It is not necessary to remove the handle rear cover from the instrument case to remove the handle front cover.

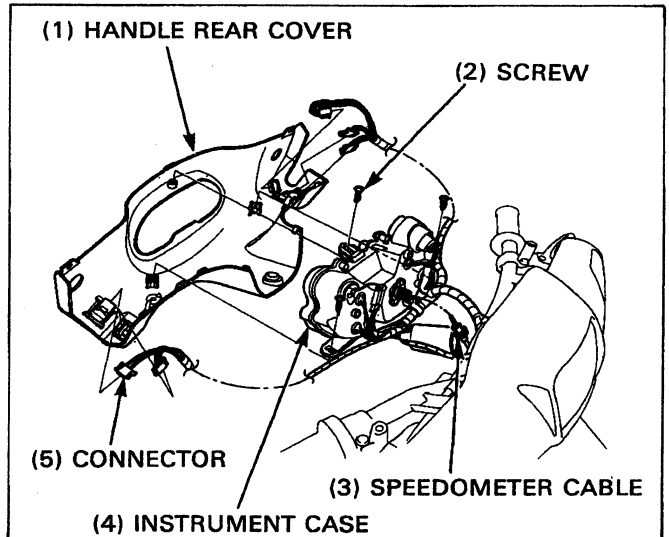

Handle Front Cover

Remove the handle rear cover from the handlebar.

Remove the two tapping screws and the screw.
Disconnect the headlight connector.
Disconnect the turn signal light wire connectors and remove the handle front cover.

