


6. Support your motorcycle securely and raise the front wheel off the ground using a maintenance stand or a hoist.
7. Loosen the left axle pinch bolt.
8. On the left side, withdraw the front axle shaft, and remove the side collars and wheel.



### Installation

1. Attach the right and left side collars in their original location on the wheel.
2. On the left side, place the wheel between the fork legs and insert the front axle shaft to the end, through the left fork leg and wheel hub.
3. Align the end of the front axle shaft with the surface of the fork leg.

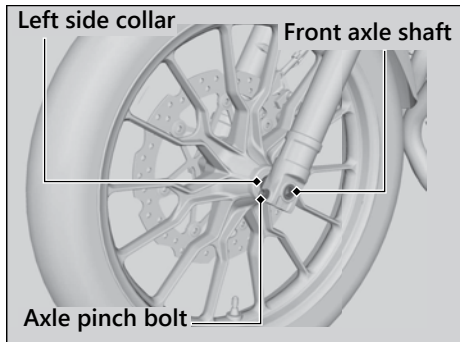