


4. Loosen the axle pinch bolt.
5. Support your motorcycle securely and raise the front wheel off the ground using a maintenance stand or a hoist.
6. On the left side, loosen and withdraw the front axle shaft, and remove the side collars and wheel.

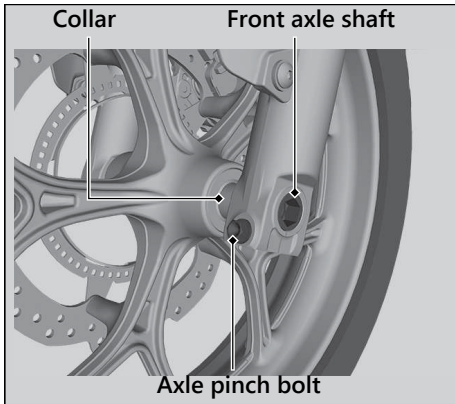

### Installation

1. Attach the side collars to the wheel.
2. On the left side, place the wheel between the fork legs and insert the front axle shaft to the end, through the left fork leg and wheel hub.
3. Tighten the axle shaft.

**Torque:** 55 lbf-ft (74 N·m, 7.5 kgf-m)